




Safe water, healthy life

Shower Filter

(Model: SF101)

Owner's Manual

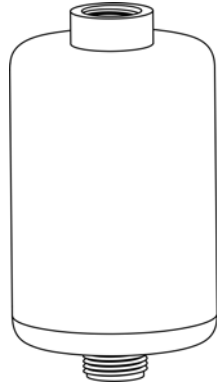

GUANGZHOU PUREEASY HI-TECH CO., LTD

Add: Rm 501, 5/F, Information Building, No.111 Science Road,

Science City, Guangzhou, China.

P.C.:510633


Tel: +86-020-32058578

Fax: +86-020-32068635

Email: sales@pureeasy.com

Web: www.pureeasy.com

Key Components

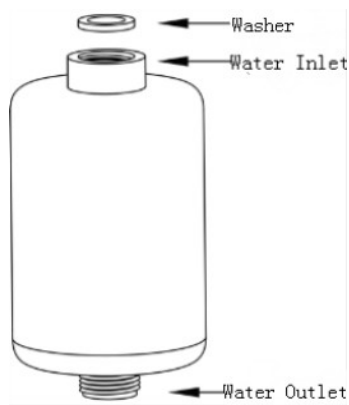

Thank you for choosing Pureeasy patented product . Pureeasy Shower filter use high-tech water purification materials - Nano-metal clusters (NMC) media, combined with the activated tourmaline crystals, which efficiently remove the residual chlorine and harmful heavy metals (Pb, Cd, Cr, etc.), protect your hair and skin from the damaging effects of Chlorine, The unique non-phosphor soften micro ball not any can moist the skin, but also very safe and environmental-friendly. Pureeasy shower filter provide safe, healthy washing and bathing water.

To ensure that you will get the best results from your shower filter , please follow the instructions carefully, especially before fitting the PUREEASY shower filter.

Technical pecification

Output:	≥6L/min
Working Pressure:	0.1-0.4MPa
Working Temperature:	5℃-85℃
Capacity:	50m ³
Weight:	Approx.395g
Size:	Φ73×132mm
Diameter	G1/2
Material:	NMC,Multi porous fiber,Non-phosphor soften micro balls,Activated tourmaline crystal

Installation of the Shower filter



Fig-2

- 1)Remove the hose connected to the mixing valve of the heater. Do not discard the washer attached to the hose.
- 2)Connect the inlet of Shower Filter to the mixing valve.

Note:

- ◆ Do not use any tools when attaching the Shower Filter to the mixing valve. Hand tighten only.
- ◆ Before installing, please make sure the washer attached to the Shower Filter is in the correct position.
- ◆ The thread of Shower Filter is plastic. While installing, make sure the thread of the filter is properly connected to the thread of the mixing valve. If you have installing difficulties, please correct the position of the thread and DO NOT apply excessive strength in case the thread strips or loose thread.

- 3) Re-attach the hose onto the outlet of Shower Filter.

Note:

- ◆ Please make sure the washer attached to the hose is in the right position
- ◆ The thread of Shower Filter is plastic. While installing, make sure the thread of the filter is properly connected to the thread of the mixing valve. If you have installing difficulties, please correct the position of the thread and DO NOT apply excessive strength in case the thread strips or loose thread.

Using the Shower Filter

- 1)After proper installation, open the mixing valve and get purified water from your Shower Filter.

Note:

- ◆ DO NOT use the water as drinkable water.
- ◆ The Shower Filter is filled with Nano-metal clusters media(NMC). Output maybe opalescent because of air bubble at the first time use. This is a normal effect and does not influence the performance of your shower filter. Run the filter for 1 minute to flush out any materials residue.Please repeat this process with every new cartridge. Either use the purified water for your plants or discard it.

- 2)To ensure optimal performance, please replace your Shower Filter on time.

Note:

The Shower Filter life is primarily determined by the quality of the incoming water used and may vary from region to region. The cartridge purifies approx. 50,000 liters, but as water conditions vary, your

cartridge may become exhausted prematurely in certain areas and should be replaced earlier. Replacing cartridge is recommended after 3-6 months.

3)The shower filter is non-pressure bearing product,which is adapt to install to the mixing valve of the water heater only.The switch setting up after the shower filter should be forbidden, or the problem caused by this item is beyond warranty.

Trouble shooting

Malfunction	Cause/Remedy
Water leaks between the water inlet and the mixing valve	A) 1) Ensure that you have tightened collar to mixing valve (DO NOT USE ANY TOOLS). B) Ensure that the provided washer has been installed.
Water leaks between the water Outlet and hose	A) Ensure that the Oring is at right place B) Ensure that the hose has been tighten to the outlet of the shower filter .

Limited Warranty

Your Pureeasy Shower filter is warranted for six months. Should your Pureeasy Shower filter prove defective within six months from the date of purchase, return it to the Pureeasy retailer from whom it was purchased. Pureeasy, at its discretion, will replace or repair the damaged item. The thread of collar is plastic, the damage of the thread of collar caused by wrong operation is beyond warranty. Please retain your purchase receipt as proof of date purchased. If you have any questions, please contact Pureeasy at:

+86-020-32058578

Sales@pureeasy.com

Items of Pack

Shower Filter:	1Set
Manual	1 piece
Inspection Tag	1 piece